


FRONT MOULDING LOCKDOWN

TO ADJUST:

LOOSEN LOCK NUT $\frac{1}{4}$ TURN.
TURN ADJUSTING SCREW OUT
TO CORRECT FOR TIGHT FITTING MOULDING
IN TO CORRECT FOR LOOSE FITTING MOULDING.
TIGHTEN LOCK NUT TO HOLD ADJUSTMENT.

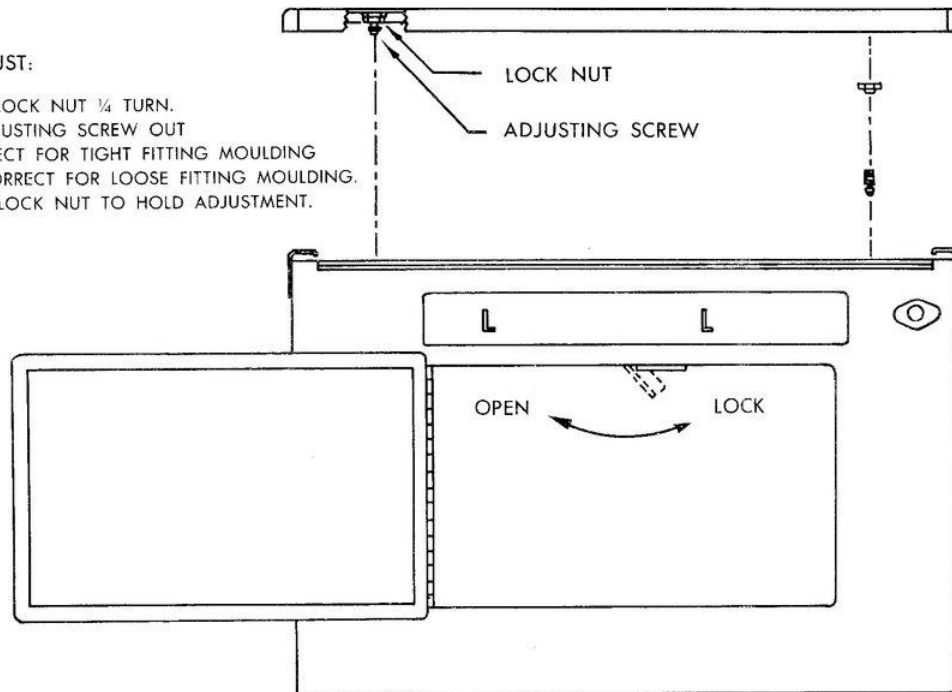

TO REMOVE:

SWING LEVER TO OPEN POSITION.
LIFT MOULDING FROM GAME BY END PIECES.

TO REPLACE:

WITH LEVER IN OPEN POSITION SEAT MOULDING ON
FRONT OF GAME. SWING LEVER TO LOCK POSITION
DO NOT FORCE. (SEE "TO ADJUST" ABOVE.)

B-